

# SPECIFICATION SHEET

## PRODUCT # : CL-345B-SI

• Step Light

• Cast Brass

### Fixture Specifications:

**Housing:** Heavy Duty Corrosion Resistant Cast Brass.

**Faceplate:** Diecast brass faceplate with frosted lens, fitted to stainless steel backplate.

**Finish:** **SI- Silver Plated.** Natural toning process. Also available in: **AB- Antique Bronze** & **GM- Gun Metal**

**Lighting Source:** Removable 2.5W LED module, 250 lumens, 3000K, 20W halogen equivalent. Rated hours: 30,000


**Wiring:** Fixture is prewired with a 25ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Silicone filled wire nut (**CX-854**) are available from Corona Lighting.

**Mounting:** Surface mounted on walls or steps. Best used on concrete, brick, or other masonry surfaces. Two screws and two anchor bolts are provided.

**Electrical Notes:** Removable LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers. Voltage range for LED module is: 8 -15Volt AC  
Ambient temperature: -40°F to 124°F. CRI: Ra > 80  
Proper grease/lubricant is suggested on threaded parts during installation process. Increasing voltage above 12 volts AC may decreased life of LED cores.


**Dimensions:** 5½"(Width) x 2½"(Height) x ½"(Depth)

**Warranty:** Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on removable LED module.

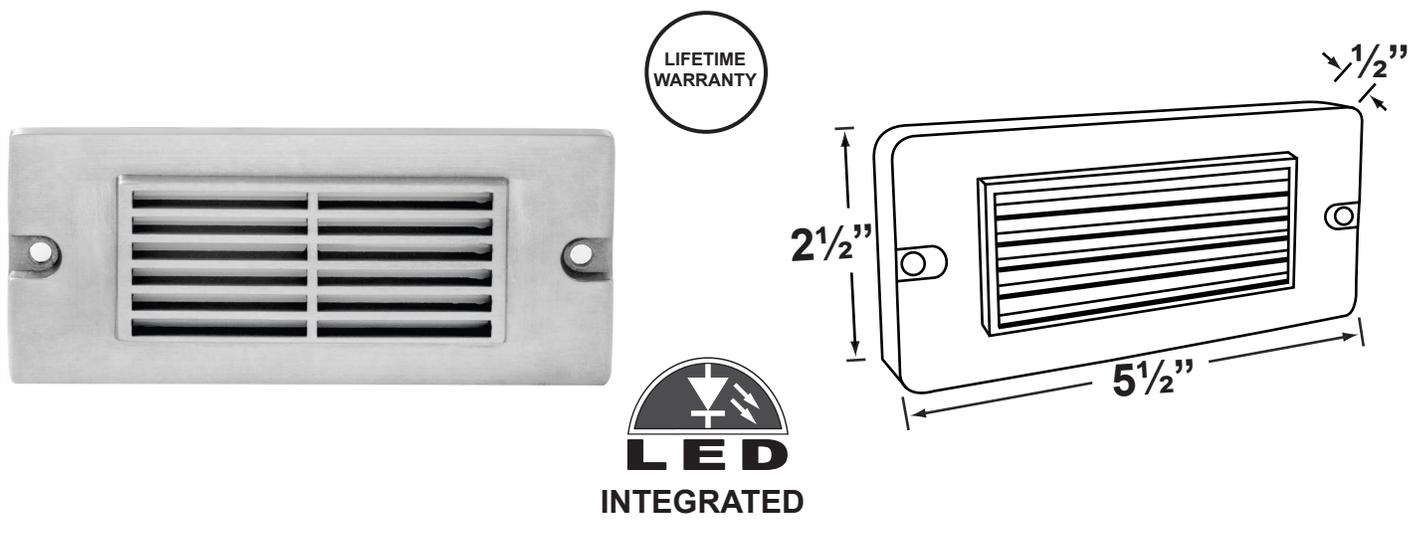

### Template of backplate

**NO BACKBOX REQUIRED**

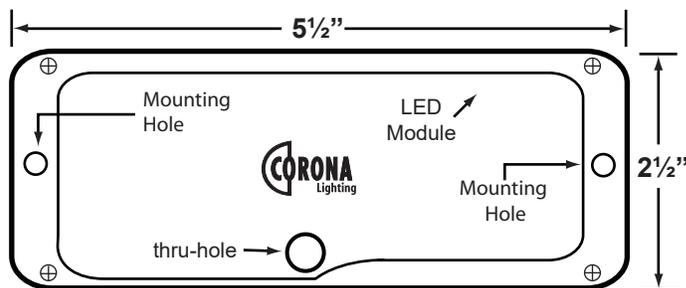

**NOTE:** This is the back of the Fixture. Looking from the front of the fixture the positions of through-hole and other details are reversed.

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

**PRODUCT # : CL-345B-SI**

•Step Lights

•Cast Brass

**Cable Connector**

CX-854 Direct Burial Silicone Filled Wire Nut, Tan

