

SPECIFICATION SHEET

PRODUCT # : CL-372B-AB

• Step Lights

• Cast Brass

Fixture Specifications:

Housing: Heavy Duty corrosion resistant galvanized steel with self-leveling adjustable bars. White powder coated.

Faceplate: Die cast brass, fitted to housing with a dense silicone gasket.

Finish: **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process.

Lens: Frosted and heat resistant glass.

Socket: S.C. Bayonet socket, attached to housing.

Lamp: 12V, S.C. Bayonet, 27W max. Available in LED (2W & 2.5W) or without lamp. See the Lamp Guide below for more information.


Gasket: Dense silicone gasket, seals faceplate to housing. Providing weather tight protection.

Wiring: Fixture is prewired with a 3ft 18-2 SPT1-W direct burial cord. Wire connector sold separately. Silicone filled wire nut (**CX-854**) is available from Corona Lighting.

Mounting: Recessed mount back box. Best used in concrete, brick and other masonry, with 5x 1/2" NPT inlets.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 8V-21V.

Warranty: Limited lifetime warranty on faceplate against manufacturer's defects.

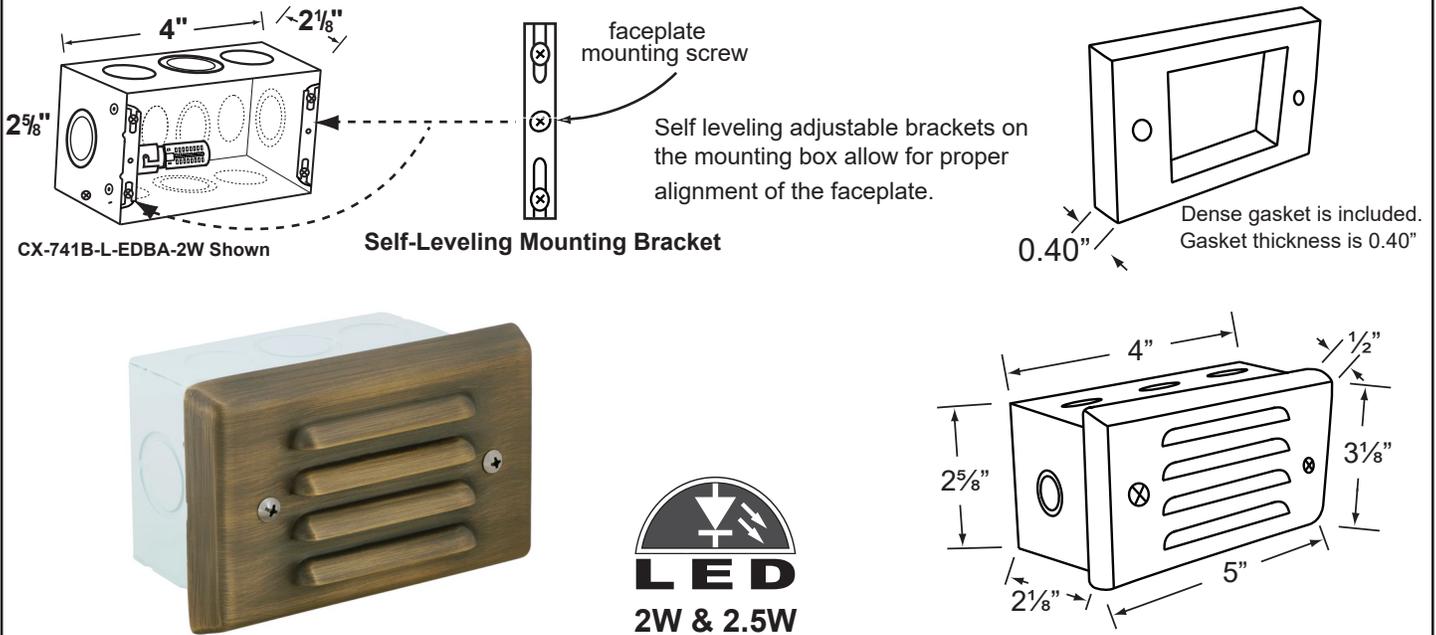

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDBA-2W	2	360°	200	2700K	25,000	20 Watt
L-EDBA-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDBA-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDBA-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDBA-AM*	2	360°	170	2000K	25,000	20 Watt

*AM- Amber color
For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: _____ DATE: _____

JOB NAME & ADDRESS: _____

PRODUCT #: _____

TOTAL QUANTITY: _____

LAMP TYPE & WATTAGE: _____

TRANSFORMER: _____

CONTRACTOR: _____

SPECIFIER: _____

• If you are ordering LED lamps you should follow the format below:

• **CL** - **product #** - **lamp** - **wattage**

CL - 372B-AB - L-EDBA - 2W-3K

Example: CL-372B-AB-L-EDBA-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET

PRODUCT # : CL-372B-AB


• Step Light

• Brass & Steel

Faceplates


CX-897B-AB Brass 4 louver faceplate with frosted glass lens

Finish: **AB**- Antique Bronze

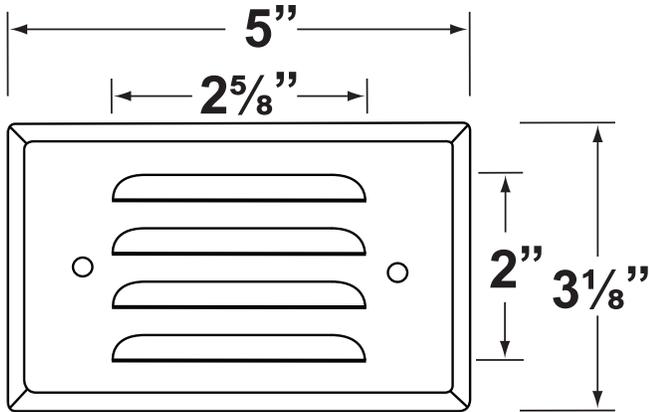

Mount Box

CX-741B Steel Mounting Box, No Lamp

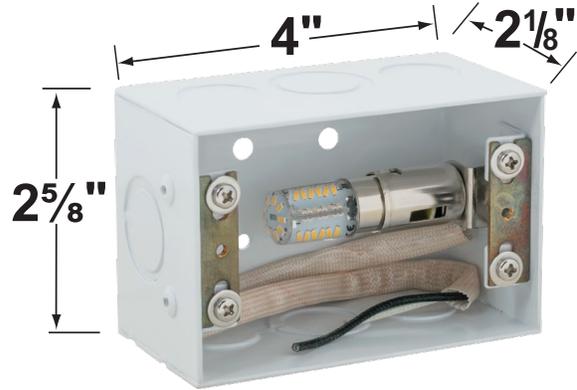

Lamp not included. Shown for demonstration.

Cable Connector

CX-854 Direct Burial Silicone Filled Wire Nut, Tan

